



Motori a corrente continua "APF" serie leggera
 Esecuzione IP23 protetta contro lo stilloccidio, autoventilata
DC "APF" (open with flange and feet) motors - light line
 IP23 execution protected against tripping, self-ventilated

TIPO TYPE	PIAZZAMENTO POSITIONING					FLANGIATURA FLANGE DIM.						INGOMBRO MAX DIMENSIONS			ESTREMITA' ALBERO SHAFT END				J kg cm ²	PESO WEIGHT kg
	A	B	C	H	K	D	L	M	N	O	P	E	F	G	d	e	v	z		
APF 40	140	100	100	90	9	200	165	130	3.5	9.5	11	305	170	227	19	40	21.5	6	72	14
APF 50	140	125	100	90	9	200	165	130	3.5	9.5	11	330	170	227	19	40	21.5	6	86	16
APF 75	160	145	135	100	12	200	165	130	3.5	10	11	401	200	240	24	50	27	8	180	19
APF 100	160	145	135	100	12	200	165	130	3.5	10	11	401	200	240	24	50	27	8	230	22
APF 100 R	160	145	155	100	12	200	165	130	3.5	10	11	421	200	240	24	50	27	8	250	24

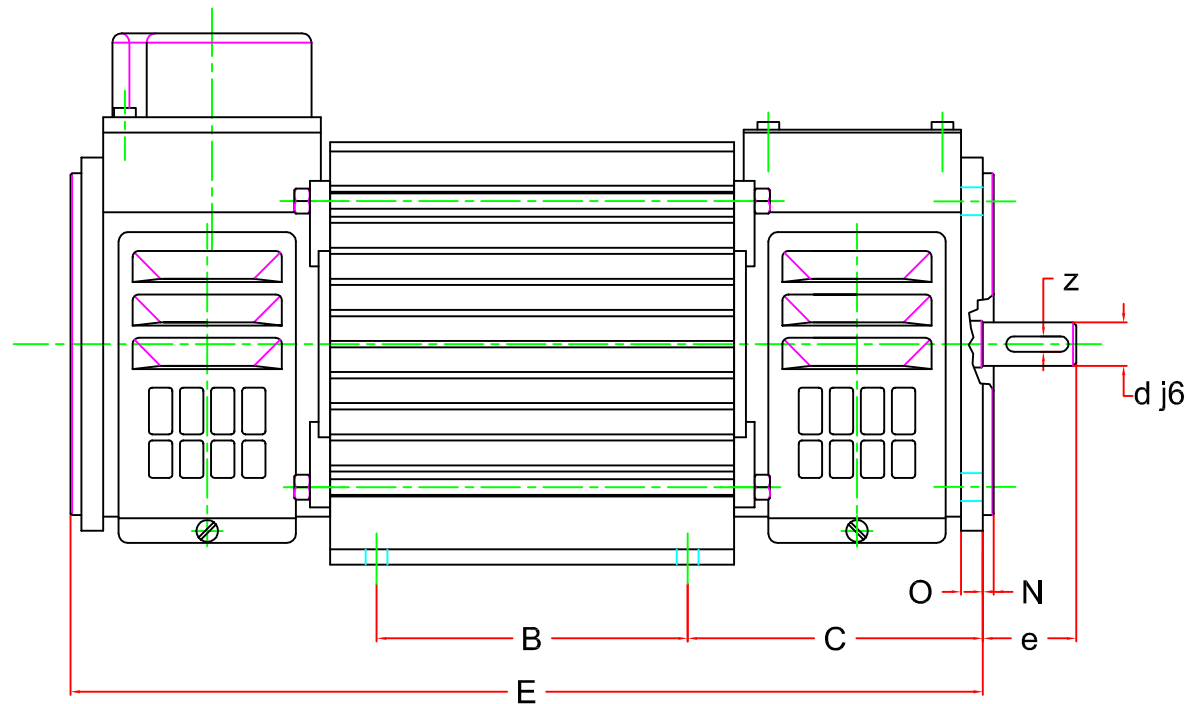

R.C.V. s.r.l.
 V. Cavour, 7 z.i.
 10070 Robassomero (TO) I
 Tel. 0039.0119241201
 Fax 0039.0119241176
 E-Mail: tecnico@rcv-srl.it

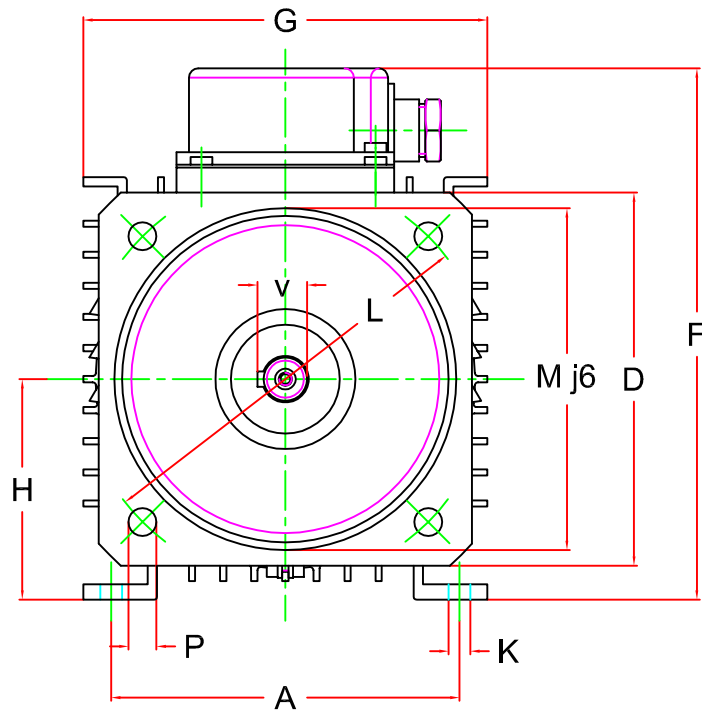

Motori a corrente continua "APF" serie leggera
 Esecuzione IP23 protetta contro lo stitlicidio, autoventilata
DC "APF" (open with flange and feet) motors - light line
 IP23 execution protected against tripping, self-ventilated

TIPO TYPE	PIAZZAMENTO POSITIONING					FLANGIATURA FLANGE DIM.					INGOMBRO MAX DIMENSIONS			ESTREMITA' ALBERO SHAFT END				J kg cm ²	PESO WEIGHT kg	
	A	B	C	H	K	D	L	M	N	O	P	E	F	G	d	e	v			z
APF 71/80	112	100	95	71	7	120	130	110	3.5	7	9	295	171	138	14	30	16	5	57	8
APF 710/105	112	125	95	71	7	120	130	110	3.5	7	9	320	171	138	14	30	16	5	62	9



R.C.V. s.r.l.
 V. Cavour, 7 z.i.
 10070 Robassomero (TO) I
 Tel. 0039.0119241201
 Fax 0039.0119241176
 E-Mail: tecnico@rcv-srl.it